

850nm Multimode Variable Optical Attenuator


Spec. Number	SR0001 Rev.01	N/A
Date	2021-12-31	2021-12-31
Part Number	MMVOA08501A0110	NA

Specifications

Parameter	Value
Wavelength (nm)	850
Bandwidth (nm)	± 40
Attenuation Range (dB)	1.0~30
Insertion Loss	≤ 1.0
Return Loss (dB)	≥ 30
Fiber Type	Multimode Fiber 200/230
Adjustment Precision (dB)	0.02
Operating Temperature	0 ~ +70
Storage Temperature	-40 ~ + 80
Dimension (LxMxH) (mm)	26x16x8

The above value is not include conenctor loss

Package Dimension

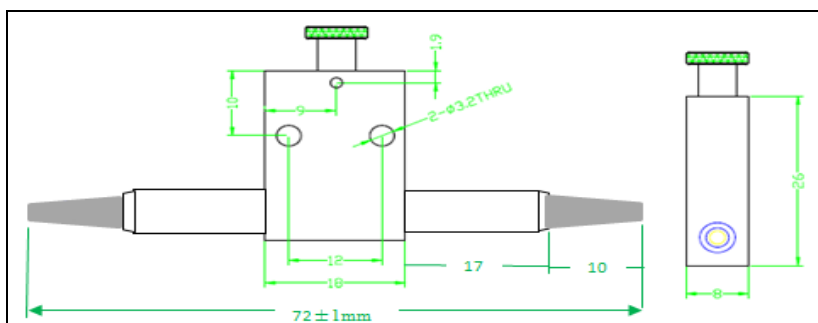

Ordering Information

MMVOA	Wavelength	Adjustment Type	Fiber Type	Pigtail Type	Length	Connector	Customer
	0850=850nm	1=Hand Adjustment	A0=MM 200/230	1=250um bare fiber 2=900um loose tube 3=3mm loose tube 4=2mm loose tube	H=0.5m 8=0.8m 1=1.0m 5=1.5m 2=2.0m 3=3.0m 4=4.0m A=2.5m B=5.0m	0=None 1=FC/UPC 2=FC/APC 3=LC/UPC 4=LC/APC 5=SC/APC 6=SC/UPC	Customer